



GUIDE DETAIL TYPE D
MAT'L: STEEL
FINISH: BRONZE PRIME

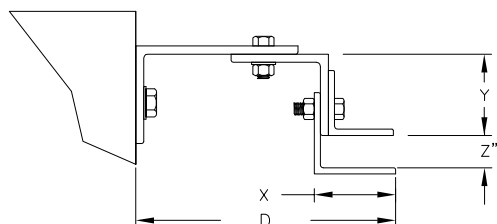

BOTTOM BAR LOCK		
TYPE	OPERATION	
	INSIDE	OUTSIDE
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>	

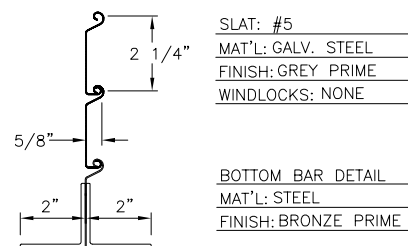

NOTES:

1. GENERAL SPECIFICATIONS SEE SHEET 1.
2. APPROX. WT. OF DOOR IS WT LBS.
3. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
4. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS, AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:

Signature: _____



MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		

3			
2			
1			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION



JOB:	
CONTRACTOR:	
ARCHITECT:	
DISTRIBUTOR:	
DRAWING NO.	OF

SERVICE DOOR || CHAIN OPER || BTWJAMB

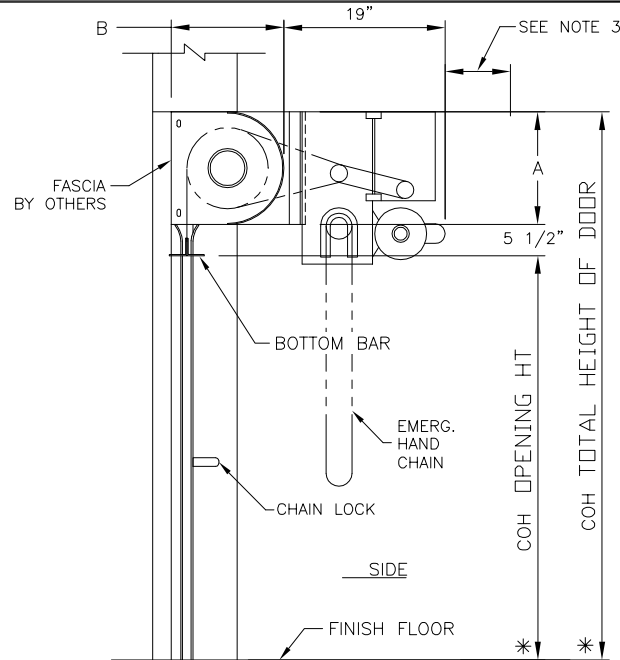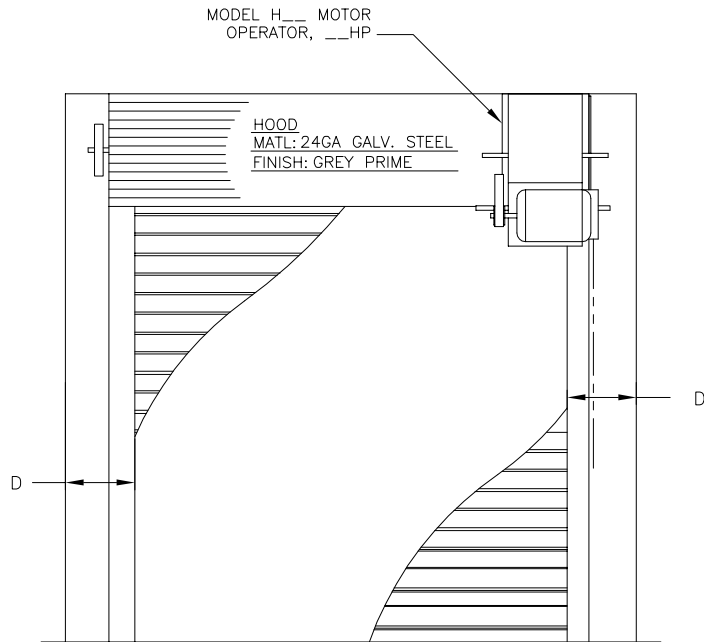


- NOTES:
1. GENERAL SPECIFICATIONS SEE SHEET 1.
 2. APPROX. WT. OF DOOR IS WT LBS.
 3. PROVIDE ADEQUATE CLEARANCE FOR WIRING MOTOR.
 4. ELECTRICAL INFORMATION:
VOLTAGE _____ PHASE _____
CONTROLLER NEMA 1
CONTROL STATION NEMA 1
PUSH BUTTON ☒ SURFACE MTD ☒
KEY STATION ☐ FLUSH MTD ☐
 5. DOOR DESIGNED FOR 25 CYCLES PER DAY.
 6. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
 7. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS, AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES, INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.


VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:


Signature: _____



GUIDE DETAIL TYPE D
MAT'L: STEEL
FINISH: BRONZE PRIME

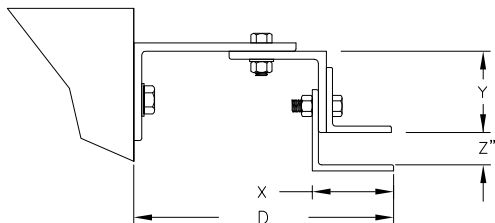

BOTTOM BAR LOCK			
TYPE	OPERATION		INTER LOCK <div><input type="checkbox"/></div>
	INSIDE	OUTSIDE	
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>	
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>	
NO LOCKING	<input type="checkbox"/>		

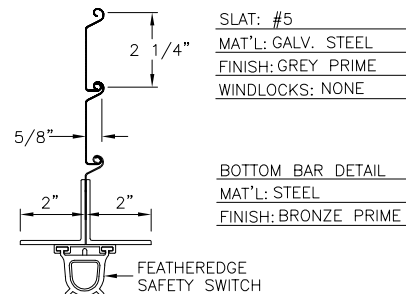

3			
2			
1			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION

Amar
GARAGE DOORS

JOB:	
CONTRACTOR:	
ARCHITECT:	
DISTRIBUTOR:	
DRAWING NO.	OF


SERVICE DOOR || H MTR OPER || BTWJAMB

MODEL GH____ MOTOR
OPERATOR, ____HP

HOOD
MAT'L: 24GA GALV. STEEL
FINISH: GREY PRIME

D

C

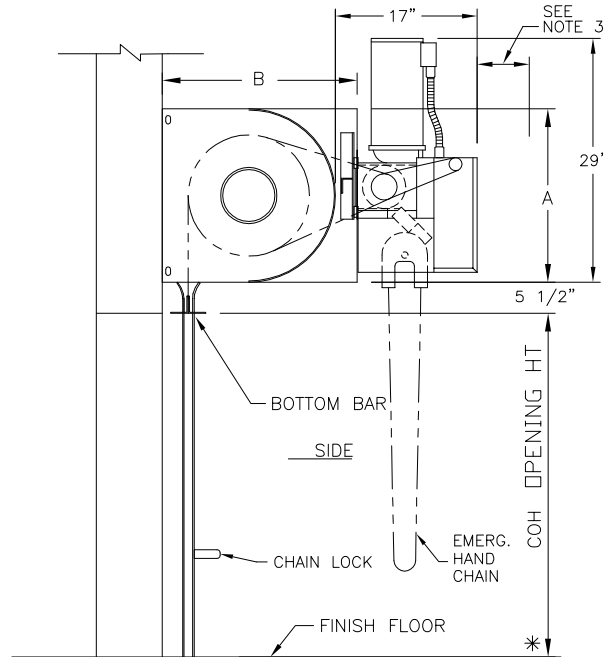

NOTES:

1. GENERAL SPECIFICATIONS SEE SHEET 1.
2. APPROX. WT. OF DOOR IS ____ WT LBS.
3. PROVIDE ADEQUATE CLEARANCE FOR WIRING MOTOR.
4. ELECTRICAL INFORMATION:
VOLTAGE _____ PHASE _____
CONTROLLER NEMA 1
CONTROL STATION NEMA 1
PUSH BUTTON ☒ SURFACE MTD ☒
KEY STATION ☐ FLUSH MTD ☐
5. DOOR DESIGNED FOR 25 CYCLES PER DAY.
6. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
7. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY
ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:

Signature: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		


<input checked="" type="checkbox"/>			
<input checked="" type="checkbox"/>			
<input checked="" type="checkbox"/>			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION

Amar
GARAGE DOORS


JOB:	
CONTRACTOR:	
ARCHITECT:	
DISTRIBUTOR:	
DRAWING NO.	OF

* VERIFY WALL
CONSTRUCTION



BOTTOM BAR LOCK			
TYPE	OPERATION		INTER LOCK
	INSIDE	OUTSIDE	
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>		<input type="checkbox"/>

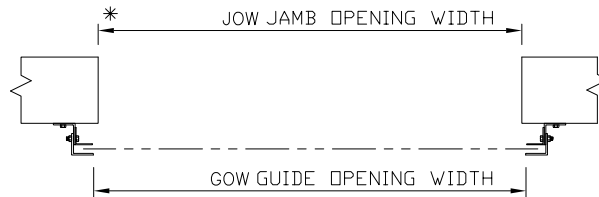

GUIDE DETAIL TYPE 1
MAT'L: STEEL
FINISH: BRONZE PRIME



GUIDE DETAIL TYPE 2
MAT'L: STEEL
FINISH: BRONZE PRIME

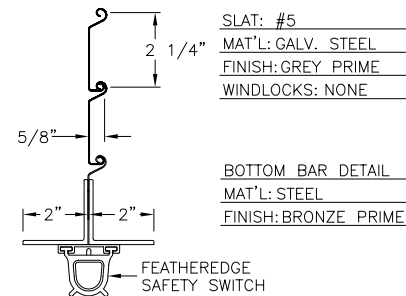


SERVICE DOOR || STD MNT GH MTR || FACEMTD

MODEL GH___ MOTOR
OPERATOR, ___HP

HOOD
MAT'L: 24GA GALV. STEEL
FINISH: GREY PRIME

SAFETY LIMIT SWITCH
PROVIDED AT TOP OF
GUIDE. CONDUIT AND
WIRING IS BY OTHERS.

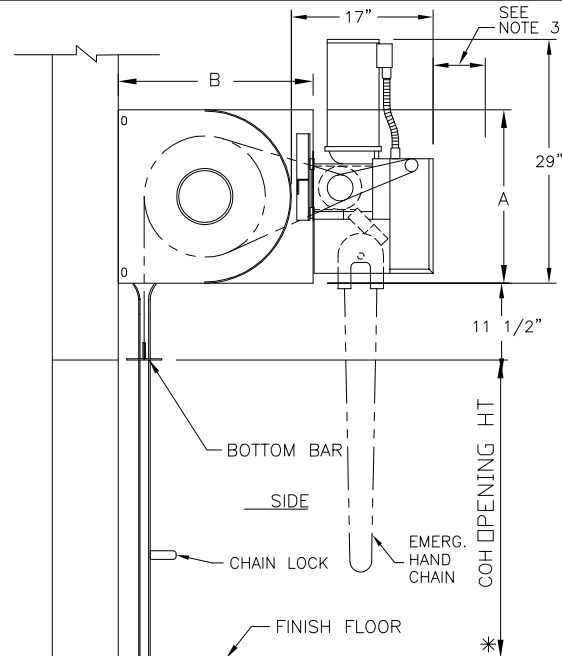

NOTES:

1. GENERAL SPECIFICATIONS SEE SHEET 1.
2. APPROX. WT. OF DOOR IS ___ WT LBS.
3. PROVIDE ADEQUATE CLEARANCE FOR WIRING MOTOR.
4. ELECTRICAL INFORMATION:
VOLTAGE _____ PHASE _____
CONTROLLER NEMA 1
CONTROL STATION NEMA 1
PUSH BUTTON ☒ SURFACE MTD ☒
KEY STATION ☐ FLUSH MTD ☐
5. DOOR DESIGNED FOR 50 CYCLES PER DAY. (HI-CYCLE)
6. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
7. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY
ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:


Signature: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		

3			
2			
1			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION


Amar
GARAGE DOORS

JOB:	
CONTRACTOR:	
ARCHITECT:	
DISTRIBUTOR:	
DRAWING NO.	OF


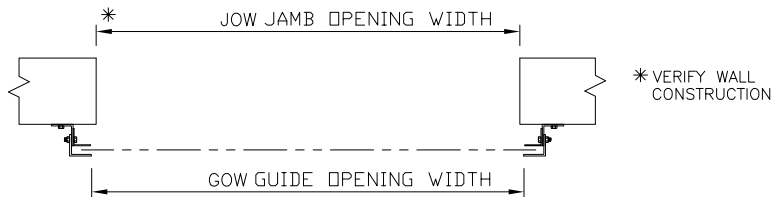


BOTTOM BAR LOCK			
TYPE	OPERATION		INTER LOCK
	INSIDE	OUTSIDE	
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

GUIDE DETAIL TYPE 1
MAT'L: STEEL
FINISH: BRONZE PRIME






GUIDE DETAIL TYPE 2
MAT'L: STEEL
FINISH: BRONZE PRIME

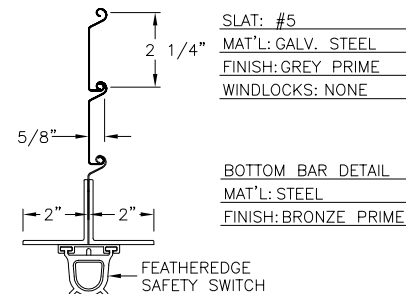


SLAT: #5
MAT'L: GALV. STEEL
FINISH: GREY PRIME
WINDLOCKS: NONE

BOTTOM BAR DETAIL
MAT'L: STEEL
FINISH: BRONZE PRIME


SERVICE DOOR || STD MNT GH MTR || HI-CYCLE || FACEMTD

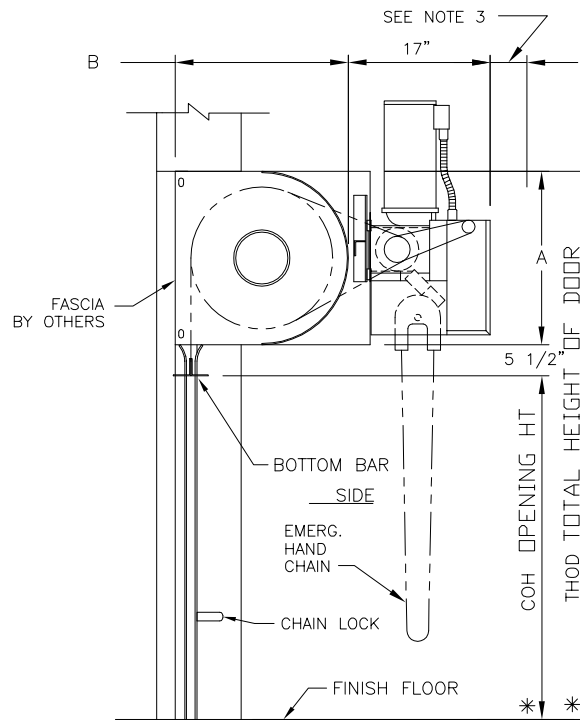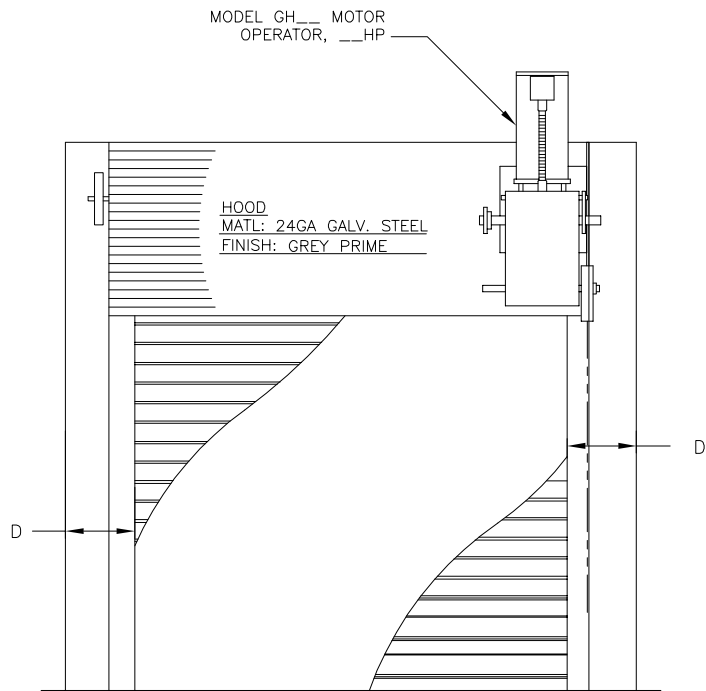

GUIDE DETAIL TYPE D
MAT'L: STEEL
FINISH: BRONZE PRIME

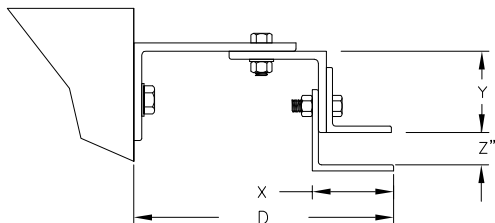

BOTTOM BAR LOCK			
TYPE	OPERATION		INTER LOCK
	INSIDE	OUTSIDE	
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>	
NO LOCKING	<input type="checkbox"/>	<input type="checkbox"/>	

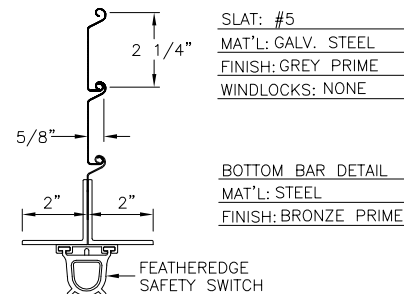

NOTES:

1. GENERAL SPECIFICATIONS SEE SHEET 1.
2. APPROX. WT. OF DOOR IS WT LBS.
3. PROVIDE ADEQUATE CLEARANCE FOR WIRING MOTOR.
4. ELECTRICAL INFORMATION:
VOLTAGE PHASE CONTROLLER NEMA 1
CONTROL STATION NEMA 1
PUSH BUTTON ☒ SURFACE MTD ☒
KEY STATION ☐ FLUSH MTD ☐
5. DOOR DESIGNED FOR 25 CYCLES PER DAY.
6. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
7. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:




Signature: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		
<input checked="" type="checkbox"/>			
<input checked="" type="checkbox"/>			
<input checked="" type="checkbox"/>			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION


Amar
GARAGE DOORS

JOB:	
CONTRACTOR:	
ARCHITECT:	
DISTRIBUTOR:	
DRAWING NO.	OF


SERVICE DOOR || STD MNT GH MTR || BTWJAMB

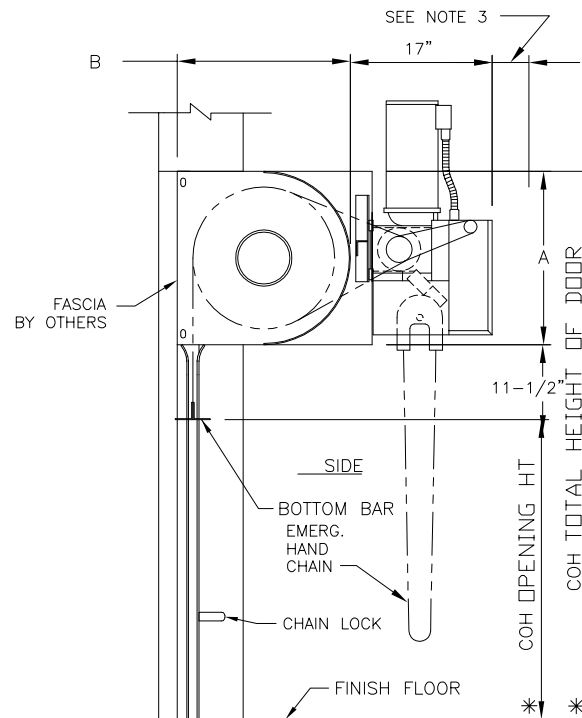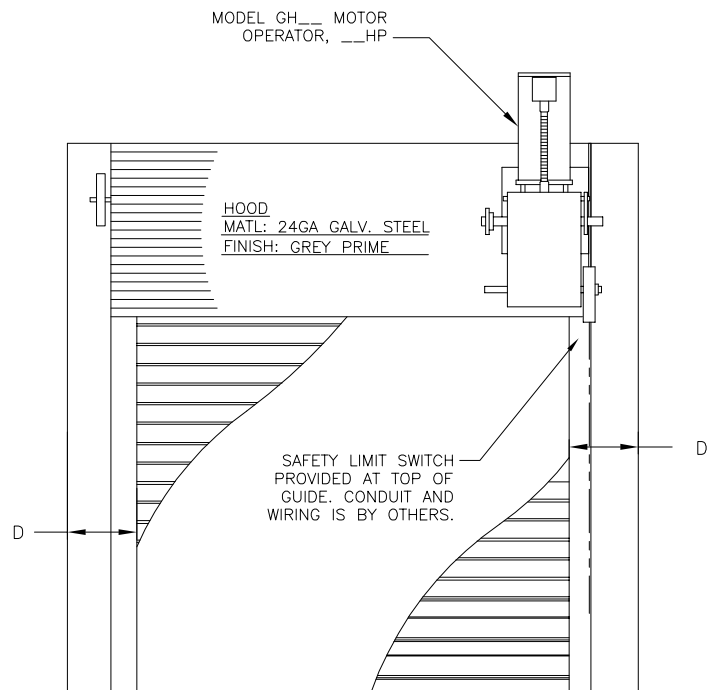

GUIDE DETAIL TYPE D
MAT'L: STEEL
FINISH: BRONZE PRIME

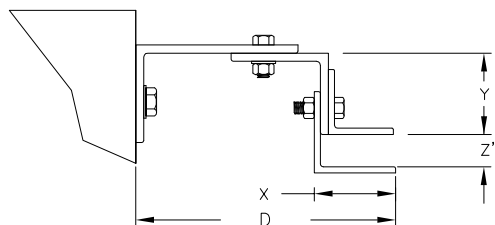

BOTTOM BAR LOCK			
TYPE	OPERATION		INTER LOCK
	INSIDE	OUTSIDE	
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>	
NO LOCKING	<input type="checkbox"/>	<input type="checkbox"/>	

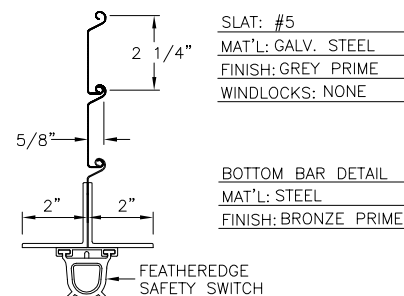

NOTES:

- GENERAL SPECIFICATIONS SEE SHEET 1.
- APPROX. WT. OF DOOR IS ___ WT LBS.
- PROVIDE ADEQUATE CLEARANCE FOR WIRING MOTOR.
- ELECTRICAL INFORMATION:
VOLTAGE _____ PHASE _____
CONTROLLER NEMA 1
CONTROL STATION NEMA 1
PUSH BUTTON ☐ SURFACE MTD ☐
KEY STATION ☐ FLUSH MTD ☐
- DOOR DESIGNED FOR 50 CYCLES PER DAY. (HI-CYCLE)
- DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
- THIS DRAWING COVERS GENERAL CONDITIONS, DIMS AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:




Signature: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		
<input type="checkbox"/>			
<input type="checkbox"/>			
<input type="checkbox"/>			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION

Amarr
GARAGE DOORS


JOB:	
CONTRACTOR:	
ARCHITECT:	
DISTRIBUTOR:	
DRAWING NO.	OF

SERVICE DOOR || STD MNT GH MTR || HI-CYCLE || BTWJAMB

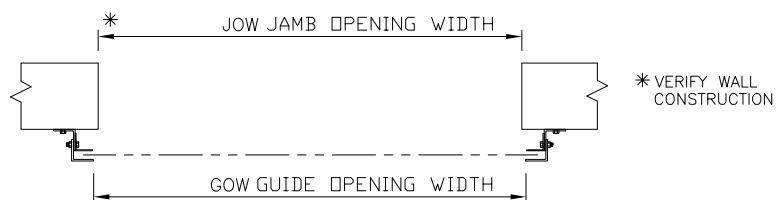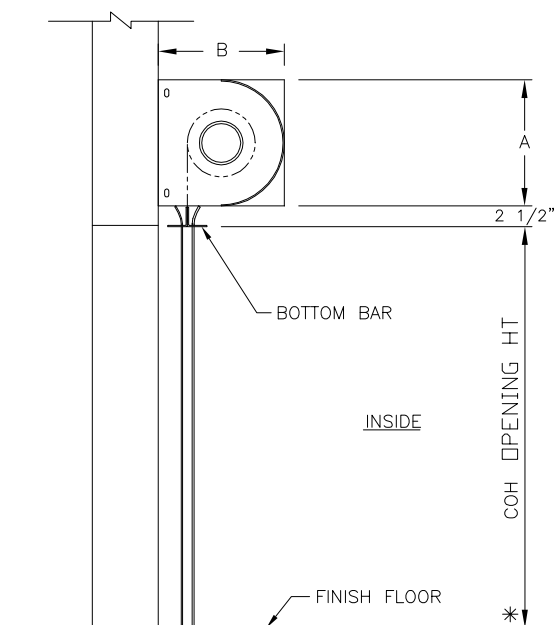
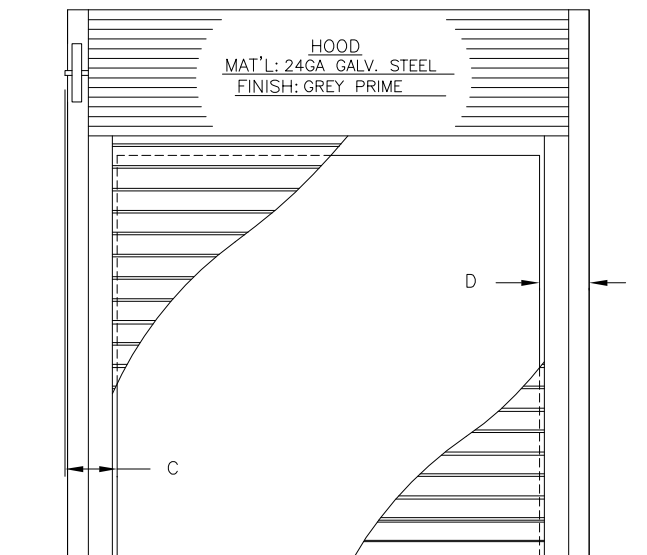


BOTTOM BAR LOCK		
TYPE	OPERATION	
	INSIDE	OUTSIDE
SLIDE BOLT	<input checked="" type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>	<input type="checkbox"/>

GUIDE DETAIL TYPE 1
MAT'L: STEEL
FINISH: BRONZE PRIME



GUIDE DETAIL TYPE 2
MAT'L: STEEL
FINISH: BRONZE PRIME



SLAT: #5
MAT'L: GALV. STEEL
FINISH: GREY PRIME
WINDLOCKS: NONE

BOTTOM BAR DETAIL
MAT'L: STEEL
FINISH: BRONZE PRIME

NOTES:

1. GENERAL SPECIFICATIONS SEE SHEET 1.
2. APPROX. WT. OF DOOR IS WT LBS.
3. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
4. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS, AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:

Signature: _____




MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		
3			
2			
1			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION




JOB: _____
CONTRACTOR: _____
ARCHITECT: _____
DISTRIBUTOR: _____

SERVICE DOOR || PUSHUP || FACEMTD


DRAWING NO. _____ OF _____

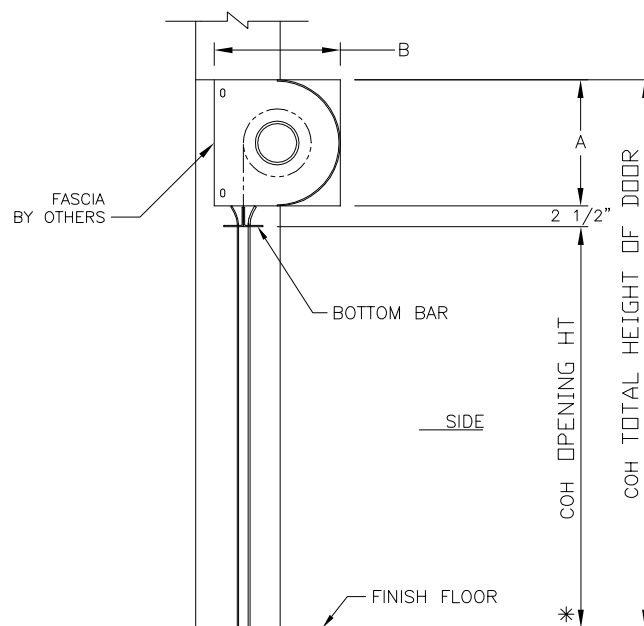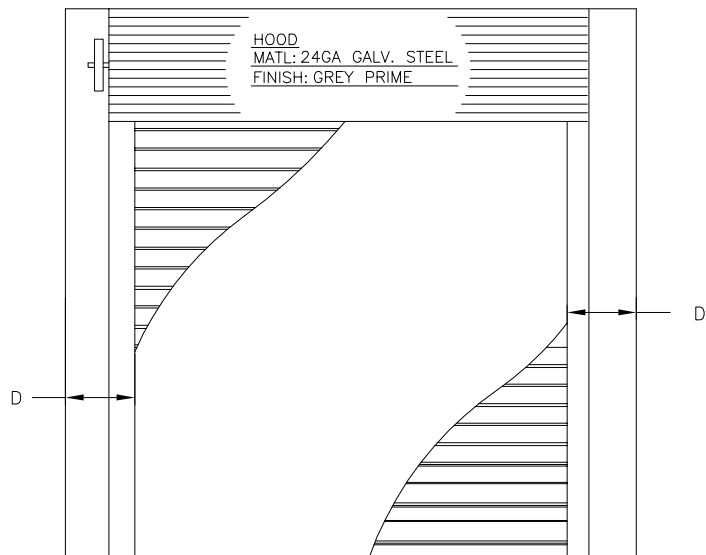

GUIDE DETAIL TYPE D
MAT'L: STEEL
FINISH: BRONZE PRIME

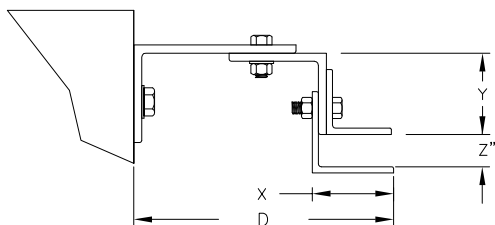

BOTTOM BAR LOCK		
TYPE	OPERATION	
	INSIDE	OUTSIDE
SLIDE BOLT	<input checked="" type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>	<input type="checkbox"/>

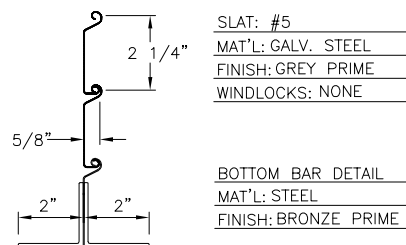

NOTES:

1. GENERAL SPECIFICATIONS SEE SHEET 1.
2. APPROX. WT. OF DOOR IS WT LBS.
3. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
4. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS, AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:

Signature: _____




MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		

3			
2			
1			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION




JOB:	
CONTRACTOR:	
ARCHITECT:	
DISTRIBUTOR:	
DRAWING NO.	OF


SERVICE DOOR || PUSHUP || BTWJAMB

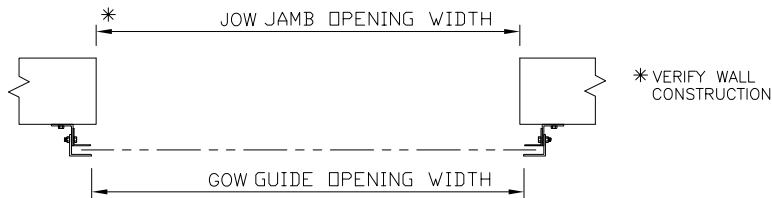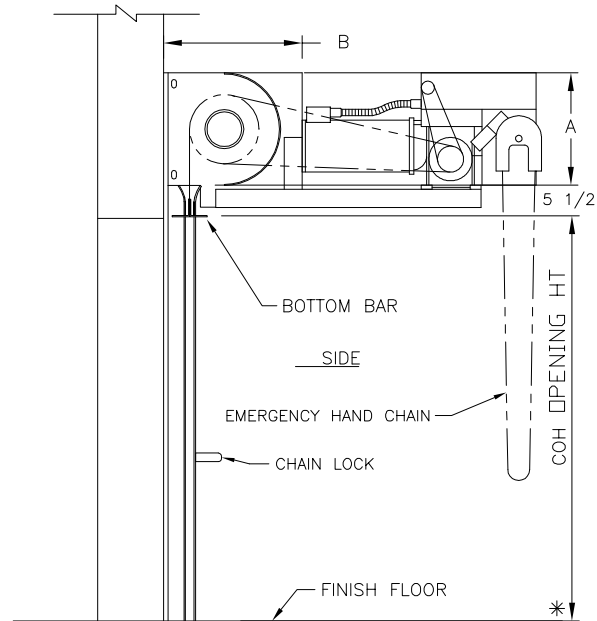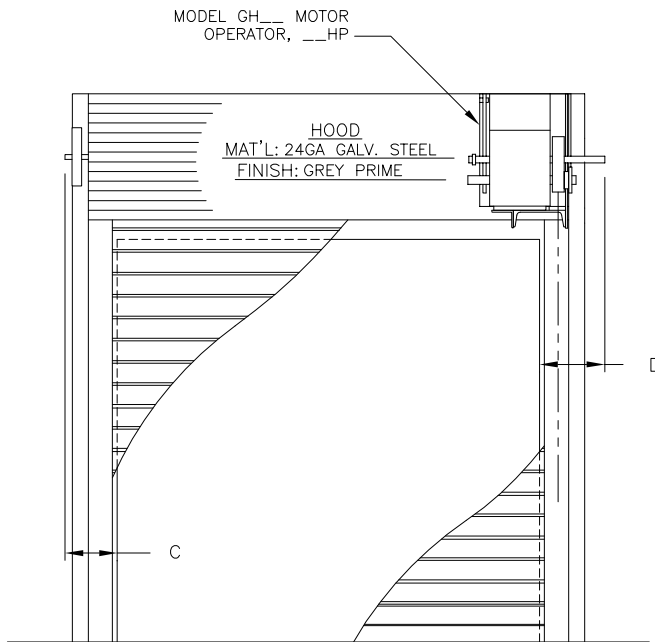


GUIDE DETAIL TYPE 1
MAT'L: STEEL
FINISH: BRONZE PRIME



GUIDE DETAIL TYPE 2
MAT'L: STEEL
FINISH: BRONZE PRIME



BOTTOM BAR LOCK			
TYPE	OPERATION		INTER LOCK
	INSIDE	OUTSIDE	
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

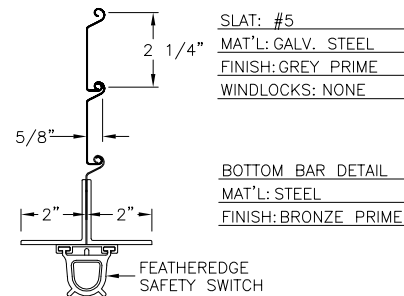

NOTES:

- GENERAL SPECIFICATIONS SEE SHEET 1.
- APPROX. WT. OF DOOR IS _____ WT LBS.
- PROVIDE ADEQUATE CLEARANCE FOR WIRING MOTOR.
- ELECTRICAL INFORMATION:
VOLTAGE _____ PHASE _____
CONTROLLER NEMA 1
CONTROL STATION NEMA 1
PUSH BUTTON ☐ SURFACE MTD ☐
KEY STATION ☐ FLUSH MTD ☐
- DOOR DESIGNED FOR 25 CYCLES PER DAY.
- DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
- THIS DRAWING COVERS GENERAL CONDITIONS, DIMS AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:




Signature: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		
<input type="checkbox"/>			
<input type="checkbox"/>			
<input type="checkbox"/>			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION

Amarr
GARAGE DOORS


JOB:		
CONTRACTOR:		
ARCHITECT:		
DISTRIBUTOR:		
DRAWING NO.		OF

SERVICE DOOR || HORIZ MNT GH MTR || FACEMTD

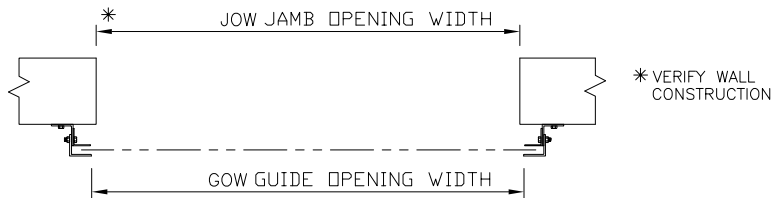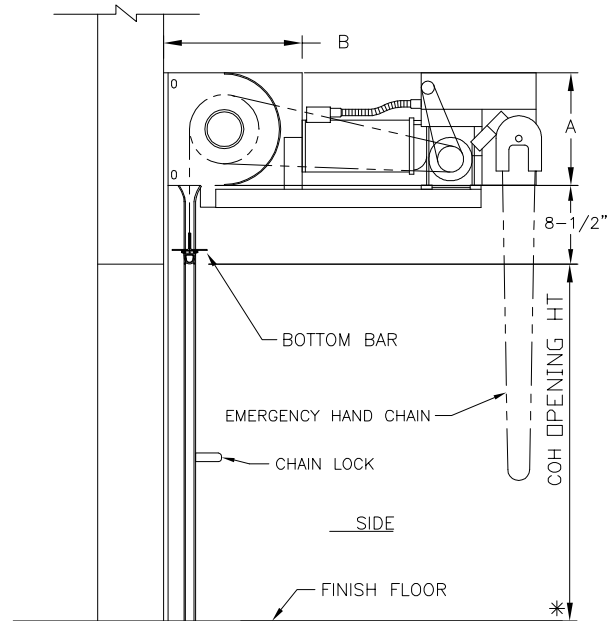
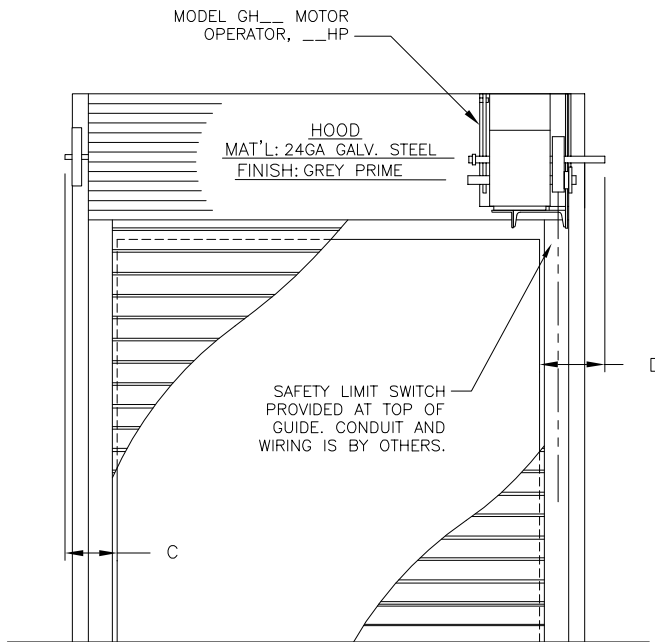


BOTTOM BAR LOCK			
TYPE	OPERATION		INTER LOCK
	INSIDE	OUTSIDE	
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

GUIDE DETAIL TYPE 1
MAT'L: STEEL
FINISH: BRONZE PRIME



GUIDE DETAIL TYPE 2
MAT'L: STEEL
FINISH: BRONZE PRIME

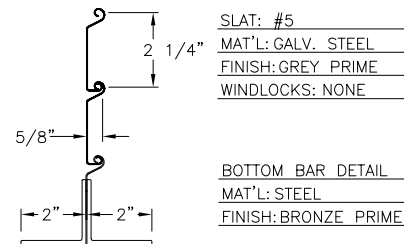

NOTES:

- GENERAL SPECIFICATIONS SEE SHEET 1.
- APPROX. WT. OF DOOR IS ___ WT LBS.
- PROVIDE ADEQUATE CLEARANCE FOR WIRING MOTOR.
- ELECTRICAL INFORMATION:
VOLTAGE _____ PHASE _____
CONTROLLER NEMA 1
CONTROL STATION NEMA 1
PUSH BUTTON ☐ SURFACE MTD ☐
KEY STATION ☐ FLUSH MTD ☐
- DOOR DESIGNED FOR 50 CYCLES PER DAY. (HI-CYCLE)
- DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
- THIS DRAWING COVERS GENERAL CONDITIONS, DIMS AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:



Signature: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		
<input type="checkbox"/>			
<input type="checkbox"/>			
<input type="checkbox"/>			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION

Amar
GARAGE DOORS

JOB:	
CONTRACTOR:	
ARCHITECT:	
DISTRIBUTOR:	
DRAWING NO.	OF

SERVICE DOOR || HORIZ MNT GH MTR || HI-CYCLE || FACEMTD

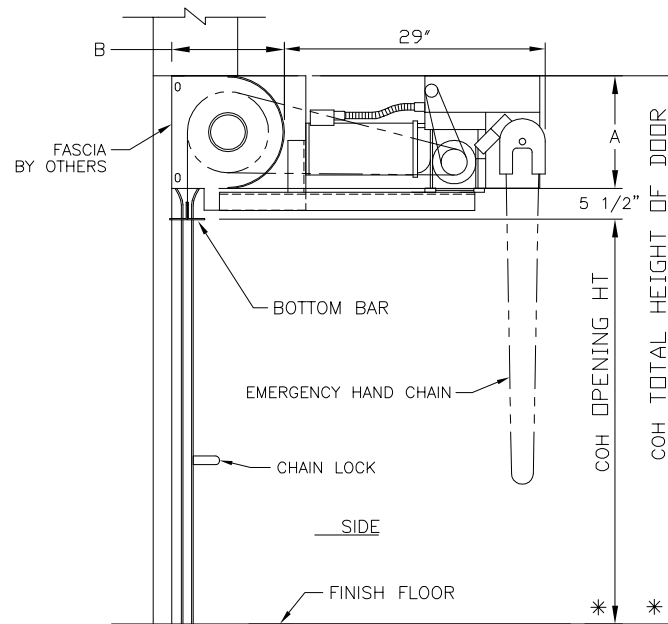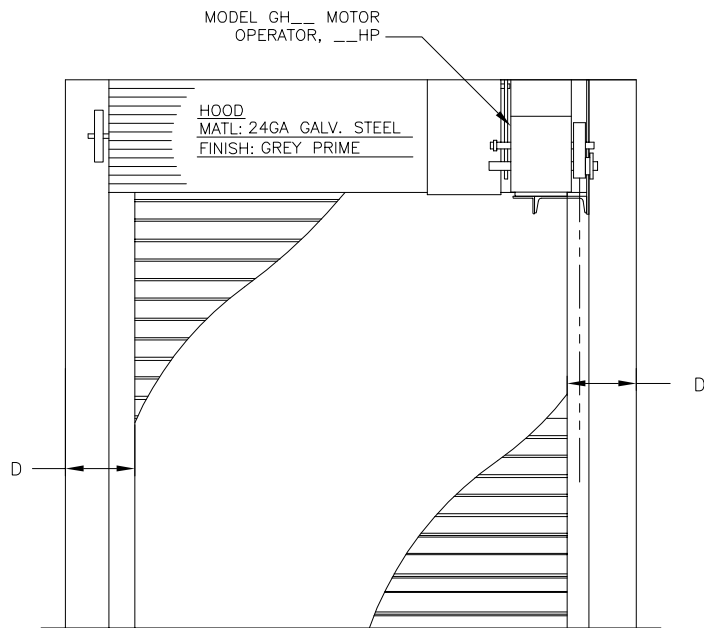

NOTES:


1. GENERAL SPECIFICATIONS SEE SHEET 1.
2. APPROX. WT. OF DOOR IS ____ WT LBS.
3. PROVIDE ADEQUATE CLEARANCE FOR WIRING MOTOR.
4. ELECTRICAL INFORMATION:
VOLTAGE _____ PHASE _____
CONTROLLER NEMA 1
CONTROL STATION NEMA 1
PUSH BUTTON ☐ SURFACE MTD ☐
KEY STATION ☐ FLUSH MTD ☐
5. DOOR DESIGNED FOR 25 CYCLES PER DAY.
6. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
7. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.


VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:


Signature: _____



GUIDE DETAIL TYPE D
MAT'L: STEEL
FINISH: BRONZE PRIME

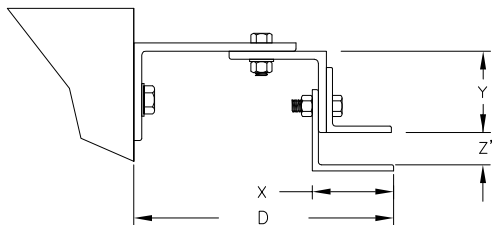

BOTTOM BAR LOCK			
TYPE	OPERATION		INTER LOCK
	INSIDE	OUTSIDE	
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>	
NO LOCKING	<input type="checkbox"/>	<input type="checkbox"/>	


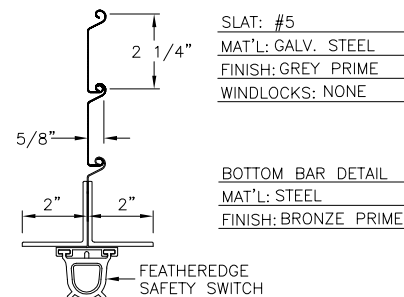


3			
2			
1			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION

Amar
GARAGE DOORS

JOB:	
CONTRACTOR:	
ARCHITECT:	
DISTRIBUTOR:	
DRAWING NO.	OF

SERVICE DOOR || HORIZ MNT GH MTR || BTWJAMB

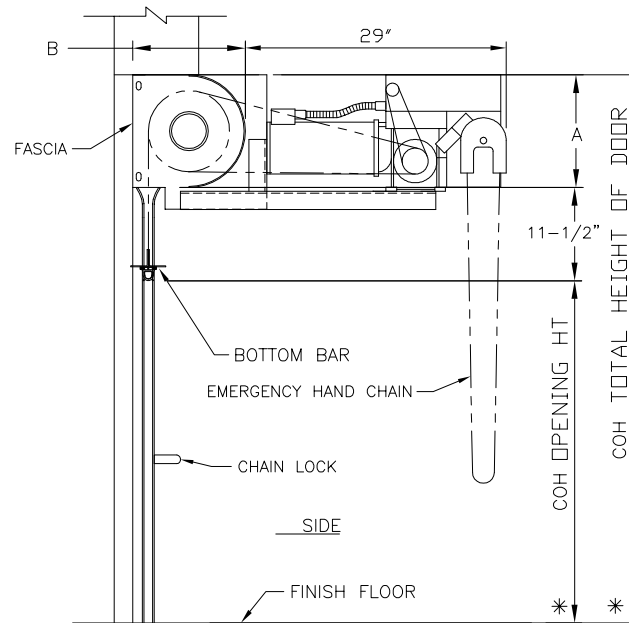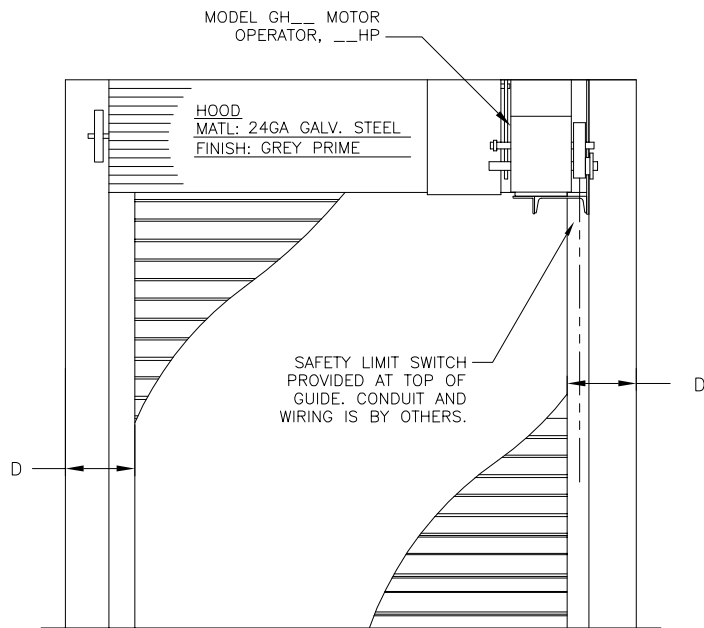

NOTES:


1. GENERAL SPECIFICATIONS SEE SHEET 1.
2. APPROX. WT. OF DOOR IS ____ WT LBS.
3. PROVIDE ADEQUATE CLEARANCE FOR WIRING MOTOR.
4. ELECTRICAL INFORMATION:
VOLTAGE _____ PHASE _____
CONTROLLER NEMA 1
CONTROL STATION NEMA 1
PUSH BUTTON ☐ SURFACE MTD ☐
KEY STATION ☐ FLUSH MTD ☐
5. DOOR DESIGNED FOR 50 CYCLES PER DAY. (HI-CYCLE)
6. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
7. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.


VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:


Signature: _____



GUIDE DETAIL TYPE D
MAT'L: STEEL
FINISH: BRONZE PRIME

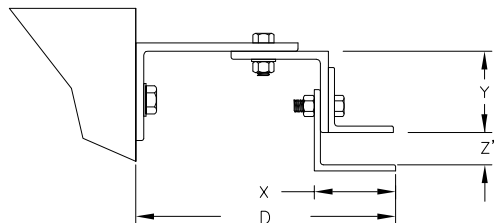

BOTTOM BAR LOCK			
TYPE	OPERATION		INTER LOCK
	INSIDE	OUTSIDE	
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>



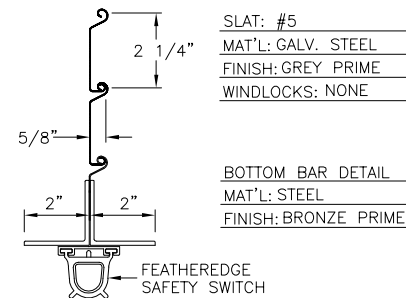


3			
2			
1			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION

Amar
GARAGE DOORS


JOB:	
CONTRACTOR:	
ARCHITECT:	
DISTRIBUTOR:	
DRAWING NO.	OF

SERVICE DOOR || HORIZ MNT GH MTR || HI-CYCLE || BTWJAMB

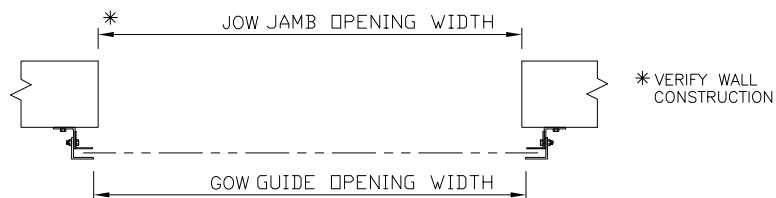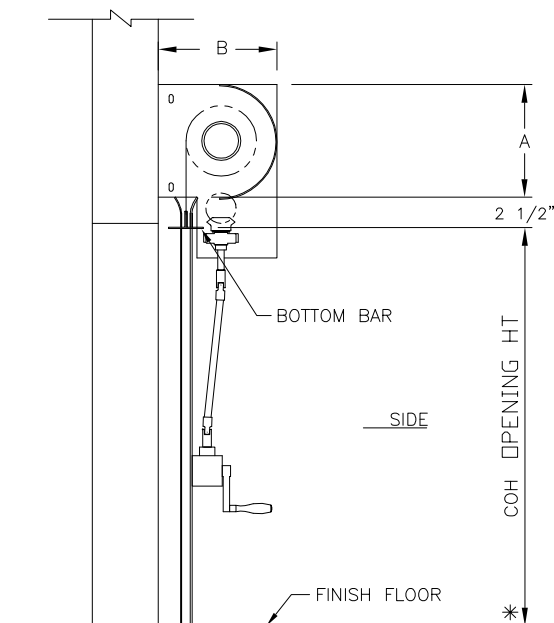
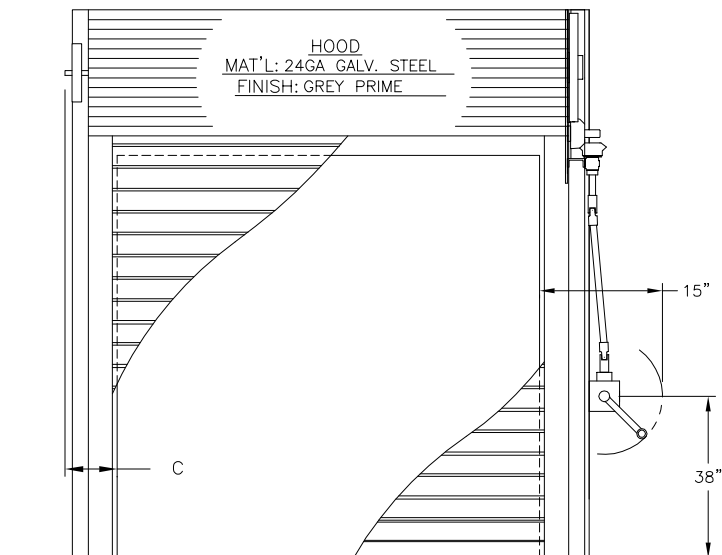


BOTTOM BAR LOCK		
TYPE	OPERATION	
	INSIDE	OUTSIDE
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>	

GUIDE DETAIL TYPE 1
MAT'L: STEEL
FINISH: BRONZE PRIME



GUIDE DETAIL TYPE 2
MAT'L: STEEL
FINISH: BRONZE PRIME



SLAT: #5
MAT'L: GALV. STEEL
FINISH: GREY PRIME
WINDLOCKS: NONE

BOTTOM BAR DETAIL
MAT'L: STEEL
FINISH: BRONZE PRIME

NOTES:

1. GENERAL SPECIFICATIONS SEE SHEET 1.
2. APPROX. WT. OF DOOR IS WT LBS.
3. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
4. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS, AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:




Signature: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		
<input type="checkbox"/>			
<input type="checkbox"/>			
<input type="checkbox"/>			
ORIGINAL DRAWING			
NO.	BY	DATE	REVISION




JOB:	
CONTRACTOR:	
ARCHITECT:	
DISTRIBUTOR:	
DRAWING NO.	OF


SERVICE DOOR || CRANK OPER || FACEMTD

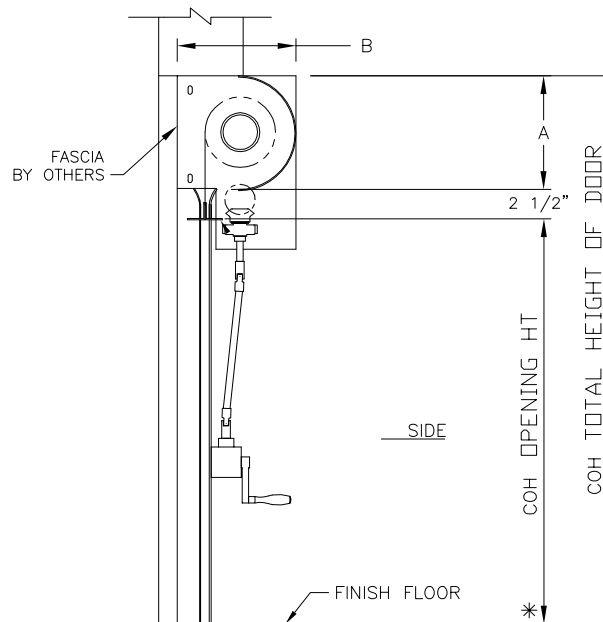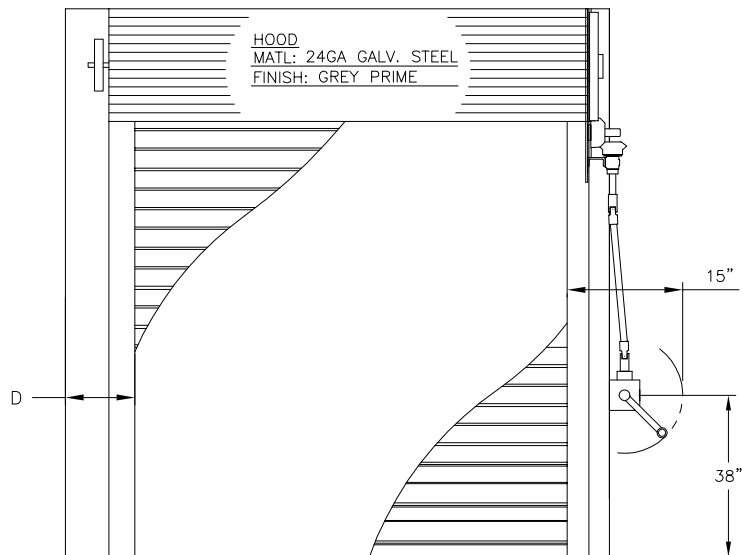

GUIDE DETAIL TYPE D
MAT'L: STEEL
FINISH: BRONZE PRIME

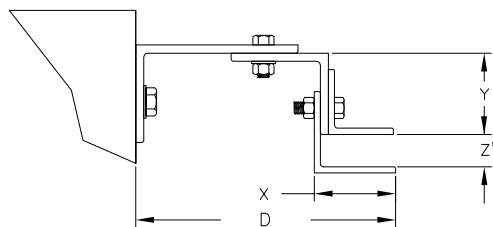

BOTTOM BAR LOCK		
TYPE	OPERATION	
	INSIDE	OUTSIDE
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>	



SLAT: #5
MAT'L: GALV. STEEL
FINISH: GREY PRIME
WINDLOCKS: NONE

BOTTOM BAR DETAIL
MAT'L: STEEL
FINISH: BRONZE PRIME

NOTES:

1. GENERAL SPECIFICATIONS SEE SHEET 1.
2. APPROX. WT. OF DOOR IS WT LBS.
3. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
4. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS, AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:

Signature: _____




MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		

3			
2			
1			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION




JOB:	
CONTRACTOR:	
ARCHITECT:	
DISTRIBUTOR:	
DRAWING NO.	OF

SERVICE DOOR || CRANK OPER || BTWJAMB

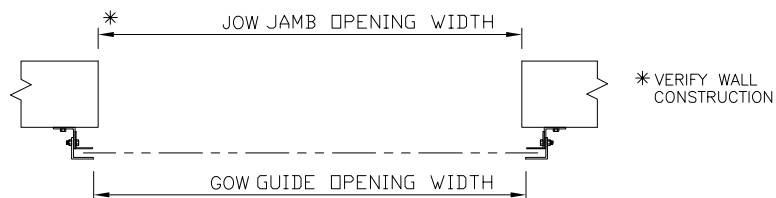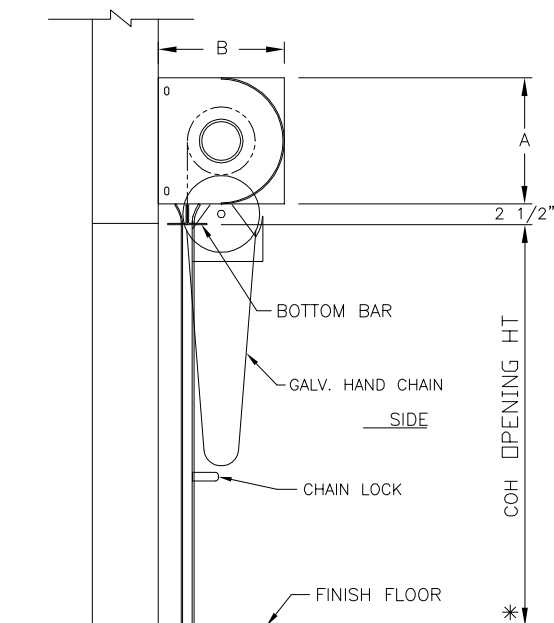
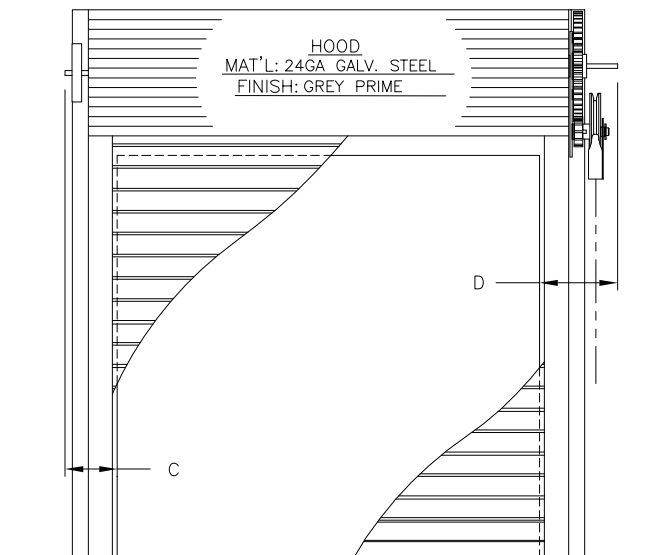


BOTTOM BAR LOCK		
TYPE	OPERATION	
	INSIDE	OUTSIDE
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>	

GUIDE DETAIL TYPE 1
MAT'L: STEEL
FINISH: BRONZE PRIME



GUIDE DETAIL TYPE 2
MAT'L: STEEL
FINISH: BRONZE PRIME

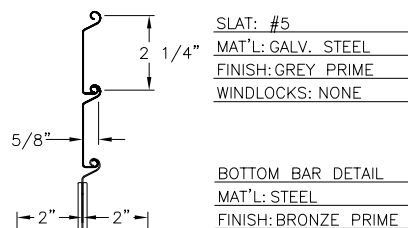

NOTES:

1. GENERAL SPECIFICATIONS SEE SHEET 1.
2. APPROX. WT. OF DOOR IS WT LBS.
3. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
4. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS, AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:

Signature: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		
3			
2			
1			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION

Amar
GARAGE DOORS

JOB:	
CONTRACTOR:	
ARCHITECT:	
DISTRIBUTOR:	
DRAWING NO.	OF


SERVICE DOOR || CHAIN OPER || FACEMTD

MODEL H____ MOTOR
OPERATOR, ____HP

HOOD
MAT'L: 24GA GALV. STEEL
FINISH: GREY PRIME

D

C

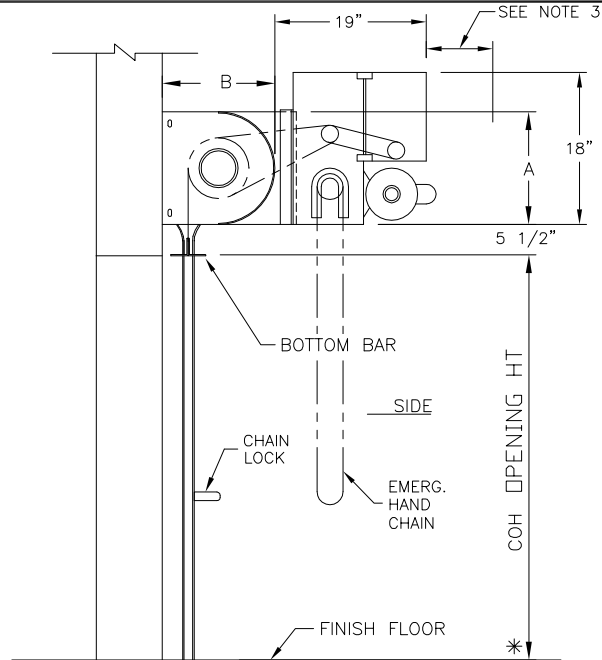

NOTES:

1. GENERAL SPECIFICATIONS SEE SHEET 1.
2. APPROX. WT. OF DOOR IS ____ WT LBS.
3. PROVIDE ADEQUATE CLEARANCE FOR WIRING MOTOR.
4. ELECTRICAL INFORMATION:
VOLTAGE _____ PHASE _____
CONTROLLER NEMA 1
CONTROL STATION NEMA 1
PUSH BUTTON ☒ SURFACE MTD ☒
KEY STATION ☐ FLUSH MTD ☐
5. DOOR DESIGNED FOR 25 CYCLES PER DAY.
6. DOOR DESIGNED TO WITHSTAND 20 PSF WINDLOAD.
7. THIS DRAWING COVERS GENERAL CONDITIONS, DIMS AND SPECIFICATIONS ONLY. DO NOT USE FOR INSTALLATION PURPOSES. INSTALLATION INSTRUCTIONS AND DIMENSIONS ARE INCLUDED WITH SHIPMENT.

DIMENSIONS AND CLEARANCES AS NOTED BY
ASTERISK (*) MUST BE FIELD CHECKED.

VERIFIED BY: _____ ON: _____

NO CANCELLATIONS OR RETURNS ON THIS ORDER:

Signature: _____

MAKE	HAND	ARCH. MARK	DOOR MARK
	AS SHOWN		
	OPPOSITE		


3			
2			
1			
			ORIGINAL DRAWING
NO.	BY	DATE	REVISION

Amar
GARAGE DOORS


JOB:	
CONTRACTOR:	
ARCHITECT:	
DISTRIBUTOR:	
DRAWING NO.	OF

* VERIFY WALL
CONSTRUCTION



BOTTOM BAR LOCK			
TYPE	OPERATION		INTER LOCK
	INSIDE	OUTSIDE	
SLIDE BOLT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CYLINDER	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
NO LOCKING	<input type="checkbox"/>		<input type="checkbox"/>

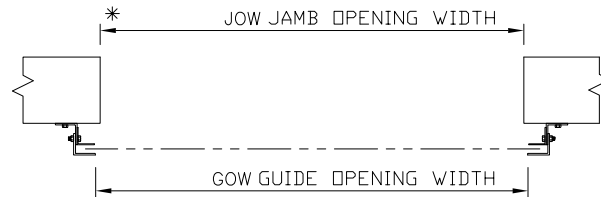

GUIDE DETAIL TYPE 1
MAT'L: STEEL
FINISH: BRONZE PRIME



GUIDE DETAIL TYPE 2
MAT'L: STEEL
FINISH: BRONZE PRIME



SLAT: #5
MAT'L: GALV. STEEL
FINISH: GREY PRIME
WINDLOCKS: NONE

BOTTOM BAR DETAIL
MAT'L: STEEL
FINISH: BRONZE PRIME

FEATHEREDGE
SAFETY SWITCH

SERVICE DOOR || H MTR OPER || FACEMTD